



Accessory Arm

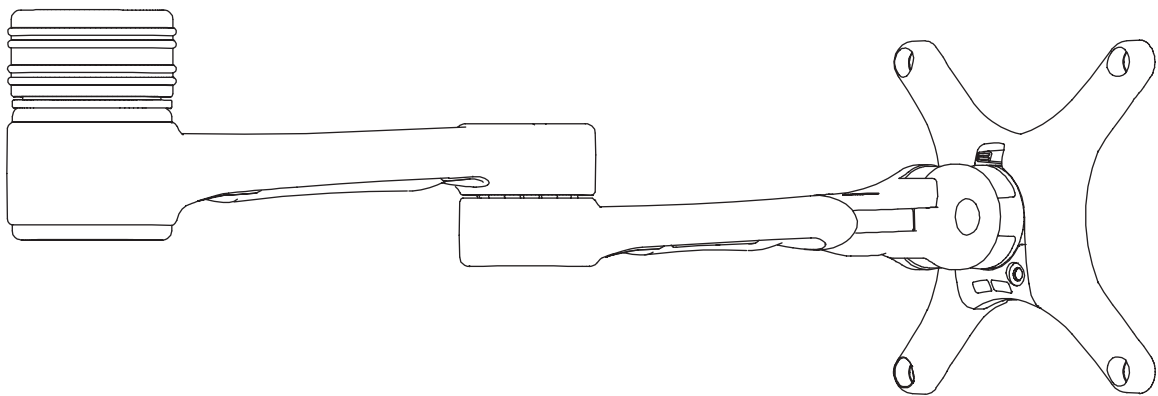


COMPONENT CHECKLIST

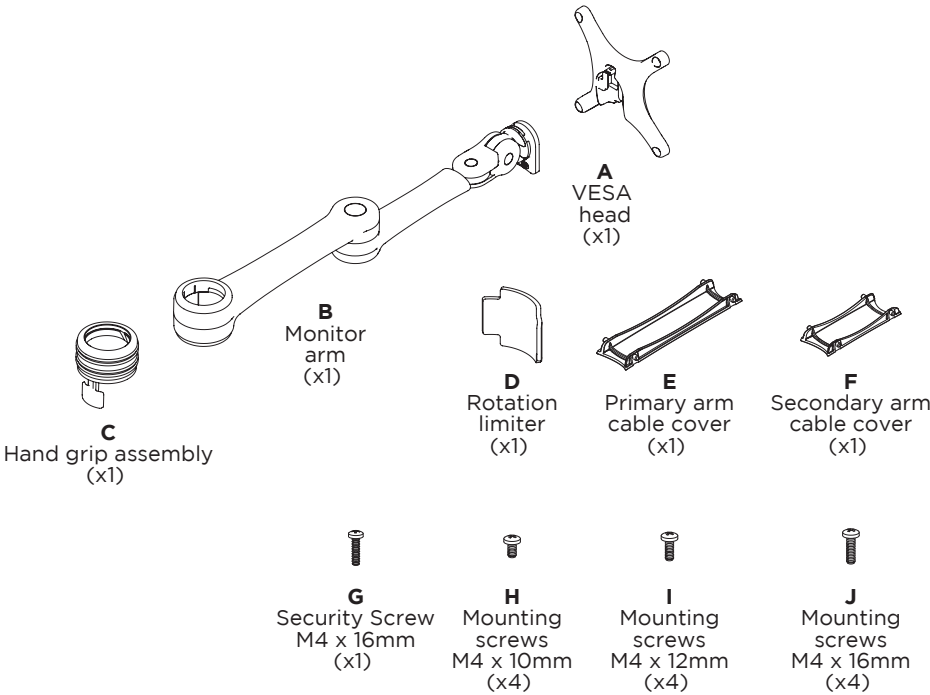

REQUIRED TOOLS

- Phillips Head Screwdriver

WEIGHT RANGE




0 - 8kg
(0 - 17.6lbs)

IMPORTANT INFORMATION

- ! Please ensure this product is installed as per these installation instructions.
- ! This product is compatible with the range of AF Poles and arms.
- ! The manufacturer accepts no responsibility for incorrect installation.

1. Install VESA monitor head

1.1 Install VESA monitor head as shown.

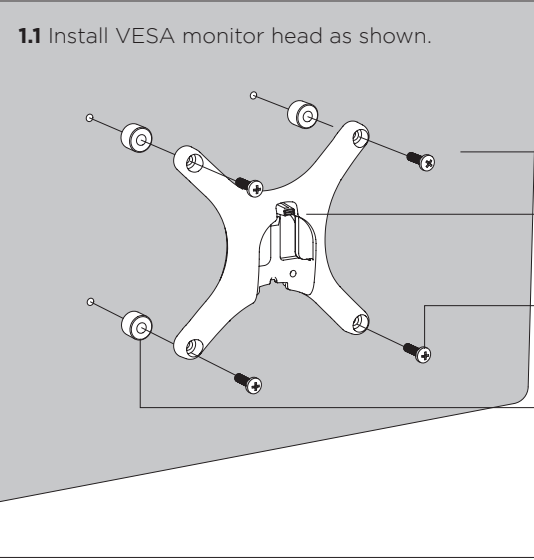


Screen

VESA monitor head

M4x10/12/16mm Phillips Head Mounting Screws

Spacers (may be required for recessed and uneven surfaces)

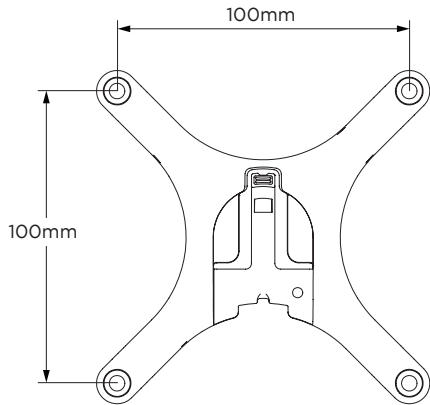


100mm


100mm

2. Install arm assembly


2.1 Remove Top Cap and Allen key from existing AF- pole product

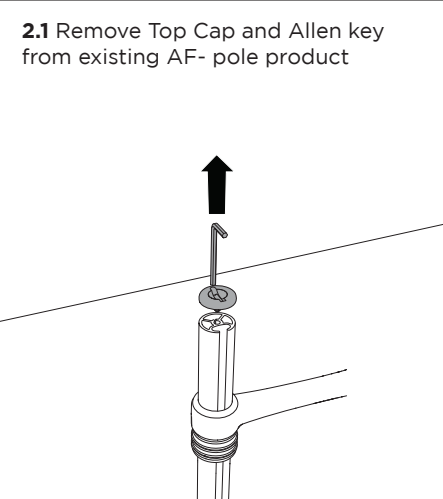

2.2 OPTIONAL ROTATION LIMITER
Insert rotation limiter for 180° rotation around mounting pole

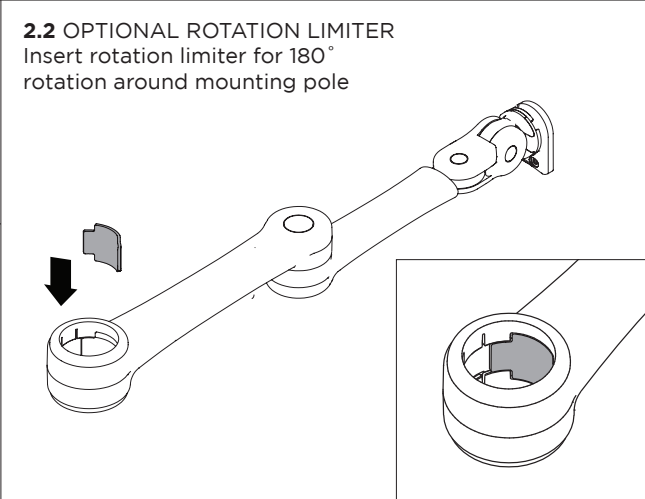


2.3 Place handgrip tab in arm assembly

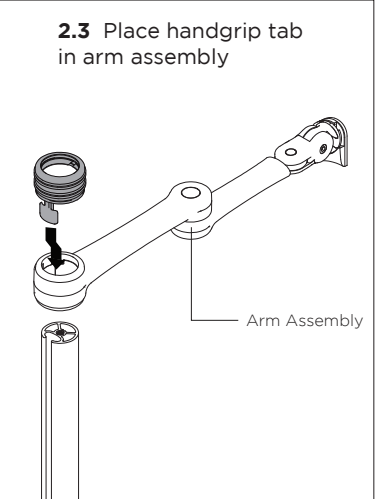


Arm Assembly

2.4 Place arm and handgrip on to the pole

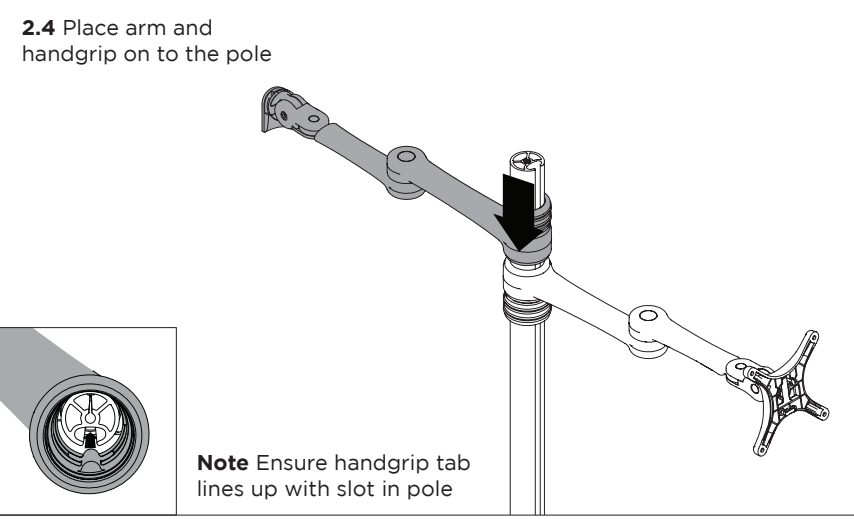

Note Ensure handgrip tab lines up with slot in pole

2.5 Turn the handgrip to fix the height of the arm and place the top cap back on to the pole

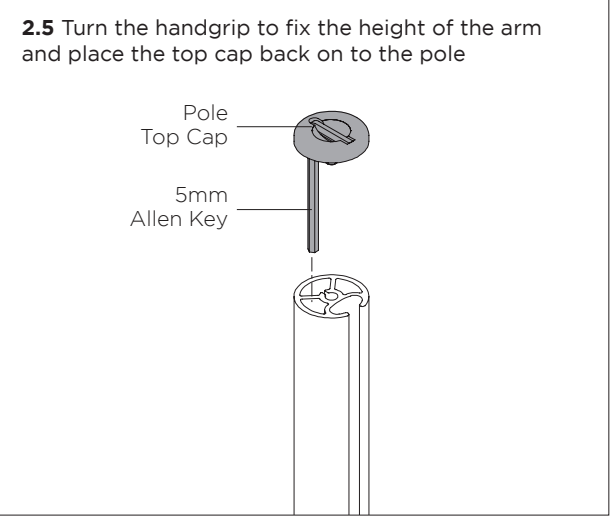


Pole Top Cap

5mm Allen Key

3. Mounting Monitor

3.1 Insert VESA monitor head into the receptacle in the Arm Assembly

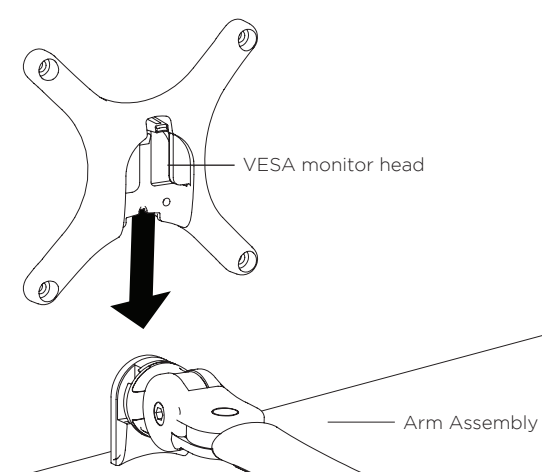


VESA monitor head

Arm Assembly

3.2 OPTIONAL SECURITY SCREW

Ensure the Monitor is supported, then loosen the Monitor head screw with the 5mm Allen Key and tilt screen up before installing the M4 x 16mm Security Screw into the Security Screw hole

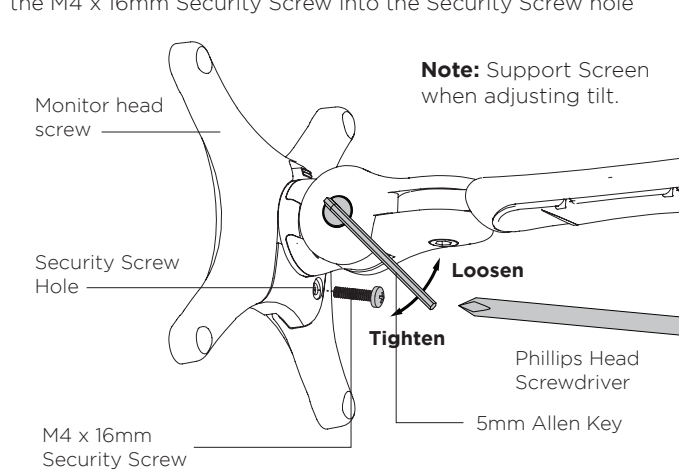

Monitor head screw

Security Screw Hole

M4 x 16mm Security Screw

Note: Support Screen when adjusting tilt.

Loosen


Tighten

Phillips Head Screwdriver


5mm Allen Key

4. Adjusting Height


4.1 Unlock Handgrip ensuring both the screen and arm assembly are supported

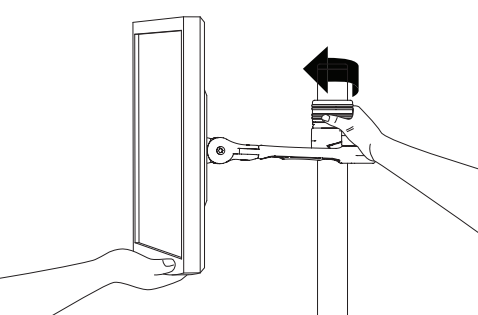

4.2 Lift/Lower the Screen to the desired height. Move both Screen and Arm assembly together

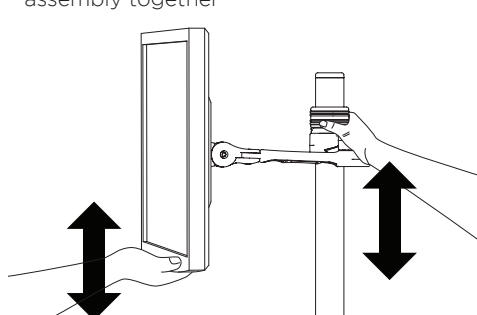


4.3 Lock Handgrip firmly

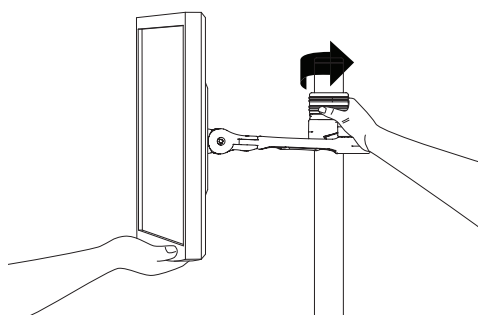

5. Cable Management


5.1 After plugging in your cables, install the Cable Covers.

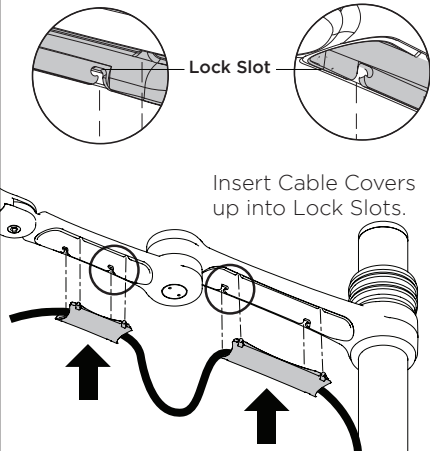

Lock Slot

Insert Cable Covers up into Lock Slots.

5.2 Push Cable Covers away from Elbow Joint to secure in place.

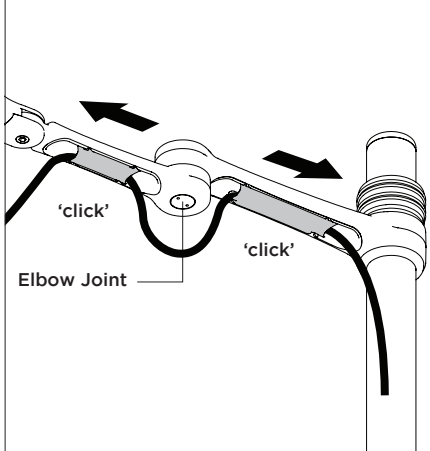


'click'

Elbow Joint

'click'

5.3 Cable Clips and Cable Stops can be installed to further manage cables.

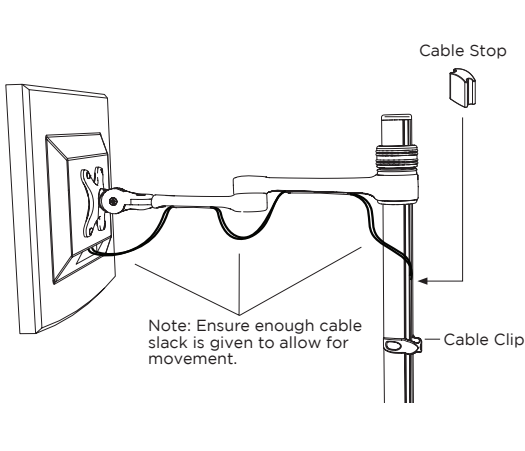


Cable Stop

Cable Clip


Note: Ensure enough cable slack is given to allow for movement.

5. Cable Management (Cont)


Insert Cable Stop on one edge of the Pole Slot



Press down firmly onto the other edge of the Cable Stop and hold. This allows the rear profile to flex in place




Allen Key Storage

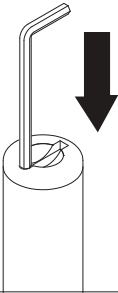


Adjusting the Display Bracket

Portrait/ Landscape

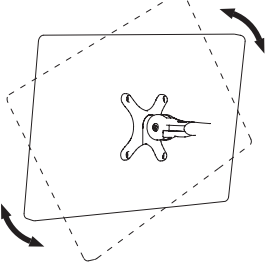

No Allen Key necessary


Tilt (Screen angle up/down)

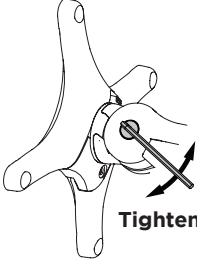

Loosen
Tighten
5mm Allen Key

Note: Support Screen when adjusting tilt.

Pan (Screen angle left/right)

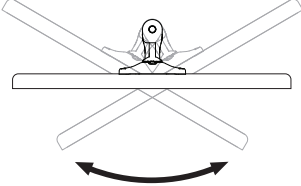

No Allen Key necessary